




## POWER & EFFICIENCY

INPUT POWER OPTIONS	AC 1PH 200-240V 50/60Hz   AC 3PH 200-240V 50/60Hz   AC 3PH 380-480V 50/60Hz		
CURRENT AT MAX SPEED (Amp)	4.5 - 3.9 A		2.4 - 2.1 A   2.0 - 1.6 A
POWER (hp)	5/8 HP BLDC Motor		
MAXIMUM SPEED (RPM)	107 RPM		
MAX AFFECTED AREA	70 ft Dia   4,900 sqft		

## DIMENSIONS & WEIGHT

FAN DIAMETER	14 ft
FAN WEIGHT	128 lbs (58 kg)

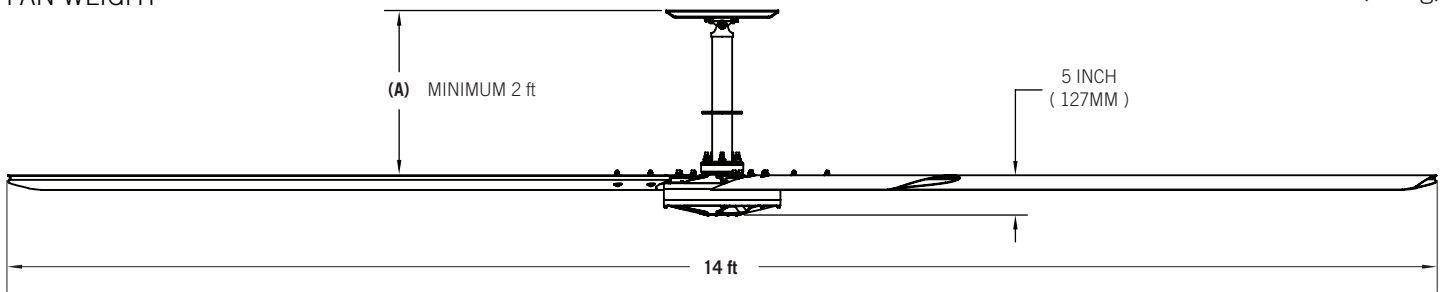

Pictured with 2 ft downrod

## MOUNTING & SAFETY

MOUNTING OPTIONS	I-beam   Glulam
DOWNROD (A)	Downrods available in 1 ft increments: 2 ft min., 10 ft max. <b>Downrod length must be specified at time of order.</b>
SAFETY FEATURES	Fan Retention System   Airfoil Retention System   Fire Relay

## IN THE BOX

INCLUDED	Fan I-beam mount with pre-wired downrod   Control panel   Install manual Mounting hardware kit   Communication Kit   Guy wire kit
OPTIONAL	Additional cable lengths   Glulam brackets   BMS Integration 350, 500, 700E Series Controller   Environmental Control   Fire Relay

## WARRANTY & CERTIFICATIONS

CERTIFICATIONS	ETL/Intertek-certified to ANSI/UL 507 and CSA C22.2 No. 113 in North America   "AMCA" Certified
WARRANTY <sup>1</sup>	Limited Lifetime Warranty

<sup>1</sup>See complete warranty for details.

